



www.bfm-europe.com

BFM Europe Limited, Trentham Lakes, Stoke-on-Trent, Staffordshire ST4 4TJ

Tel: 01782 339000 Fax: 01782 339009 Email: info@bfm-europe.com

VERINE

FIRES TO INSPIRE

gas fires 2012



Welcome to Verine

At Verine we know how important it is to create a stylish and relaxing living environment. That's why we've developed this collection of premium gas fires to complement all tastes and lifestyles.



Michael Duce

"I believe our success stems from a combination of innovative design, investment in technology and the highest quality manufacturing standards.

As a result all Verine fires carry a 5 year guarantee to reflect my belief in their quality and durability, and our experienced Verine retailers are hand-picked to give you the very best advice and service.

This brochure has been designed to make the purchase of your new Verine fire as simple as possible. I hope you will find it both informative and inspiring."



Today BFM Europe is the fastest growing domestic fire producer in the country with an unequalled reputation for quality and service. Every Verine branded gas fire is developed and manufactured in Britain at our purpose built, state-of-the-art facility in Stoke-on-Trent.



Our 5 year guarantee

From design stage to manufacture every effort is taken to produce an appliance that will provide exceptional and continued standards of safety and performance. Every fire is assessed and approved by leading independent organisations and rigorously checked by our Quality Control department before leaving our state-of-the-art facility.

Therefore, we are confident you'll be enjoying the warmth of a Verine fire for many years to come. That's why we are able to provide a remarkable 5 Year Guarantee† with every gas fire, giving you reassurance and peace of mind. We will guarantee your fire for 5 Years* against manufacturing and material defects, including parts and labour, subject to proof of annual service and replacement of the oxy-pilot assembly.

†A 7 Year Guarantee is offered on selected products.

*Terms and conditions apply.



Find your perfect fire

Before you begin..... 5
High efficiency fires 6-7



Conventional flue

Hearth mounted OPEN FRONTED

Midas Plus 8-9
Quasar Plus..... 10-11
Orbis Plus 12-13

GLASS FRONTED

Midas HE..... 14-15
Quasar HE..... 16-17
Frontier HE..... 18-19
Orbis HE 20-21
Meridian HE 22-23

Wall mounted

Fontana Compact HE..... 24-25
Fontana HE..... 26-27
Atina HE 28-29
Eden HE 30-31

Suites

Avelli 34-35

high efficiency

Balanced flue

Hearth mounted

Elypse..... 40-41
Alpena 42-43
Meridian BF..... 22-23

Wall mounted

Fontana Compact HE..... 24-25
Fontana HE..... 26-27
Eden BF 30-31
Carmelo HE 32-33
Marcello 44-45

Suites

Avelli BF..... 34-35
Distinction BF 36-37
Da Vinci BF 38-39



Hearth mounted fires

Ravenna Power Flue 46-47	Frontier..... 54-55
Acclaim..... 48-49	Midas..... 56-57
Zodiac 50-51	Orbis 58-59
Quasar..... 52-53	



Wall mounted fires

Atina 60-61
Vertex..... 62-63

Guarantee, accessories & power flue installation

Our guarantee..... 2
Fire accessories 64-65
Power flue installations..... 66-67



VERINE

FIRES TO INSPIRE

Beautiful fires, designed to allure

Choose a Verine fire and all your expectations will be fulfilled. Elegant, sophisticated and designed to perfection. Verine fires are all this and more. Crafted to not only captivate and beguile, they are built to the highest standards, are energy efficient and perform brilliantly.

Expect optimum quality & performance from your fire

Verine fires are built to last in our state-of-the-art UK manufacturing facility where our quality standards meet the stringent demands of ISO 9001/2000. That's why we are able to offer an impressive 5 Year Guarantee on all gas fires.

Every fire in the range features a Flame Supervision Device (FSD) which detects the presence of a flame, and in the absence of that flame, prevents uncontrolled release of gas to the burner. For maximum safety each conventional flue model also includes an Oxygen Depletion Sensor (ODS) which shuts off the gas supply to the main burner in the unlikely event of a fault.

We recommend that all gas appliances be serviced by a Gas Safe Register engineer to ensure continued safe operation and optimum performance throughout the lifetime of the product. In order to encourage and promote this good practice, an annual service, including replacement of the oxy-pilot, is a condition of our 5 Year Guarantee.

Expect the highest level of after sales service & expert advice

For over 45 years Verine have sold quality products and given quality service, elegance and innovation to the fireplace industry. Specially appointed retailers have been established nationally to display our products, install them and give expert advice to help you choose the correct appliance to suit your needs.

We want you to get the maximum benefit from this expertise and therefore recommend you avoid purchasing any Verine product over the internet, especially from companies not located in your area who are unable to offer the highest levels of aftersales service.

Before you begin

There is a Verine fire for all tastes, from traditional to contemporary chic. However, before you make your final selection, please take time to consider the following.

RADIANT OR CONVECTOR?

A radiant fire emanates heat from the combustion chamber only, which is why Verine radiant fires incorporate a glowing back panel to maximise heat output. A convector fire has the added benefit of a heat exchanger attached to the back of the fire. This draws cold air in and sends it back out into the room as hot air, maximising heat output whilst keeping your fuel bills down.

POWER

Your gas supply will either be Natural Gas or LPG, depending on the area in which you live.



Natural Gas
The most common gas supply



LPG
Alternative for houses with no Natural Gas supply

CHIMNEY OR FLUE?

Your choice of fire will be dictated by the type of chimney or flue you have. If you're not sure, then take a look at your roof and cross-reference it with the simple guide below. It is also worth noting that a slimline fire will fit virtually any chimney or flue, whereas a full-depth often requires a traditional chimney or rebate on the fire surround.



Brick Chimney
A conventional brick chimney is easily recognisable by a chimney stack with accompanying terracotta pot or gas terminal.



Pre-Fabricated Flue
This is an interlocking metal flue tube system easily identifiable by a metal flue and terminal on the roof and a metal flue box behind the fire.



Pre-Cast Flue
Built from concrete or clay blocks, pre-cast flues provide a rectangular section flue. They can be identified by a ridge vent or metal flue tube and terminal on the roof. All fires featuring this icon are suitable for Pre-Cast flues conforming to BS EN 1858.

NO CHIMNEY OR FLUE?

Some properties have no chimney or flue, in which case a balanced flue or powerflue is required.



Powerflue fires expel the flue gases directly outside the building through the use of an electronically driven fan unit mounted on the external wall. A sophisticated microprocessor monitors performance and automatically shuts off the fire in the unlikely event of operation failure.



Balanced Flue fires vent directly outside through a co-axial pipe (one pipe within a larger pipe). The outer pipe draws air in from the outside and the inner pipe expels combustion gases. An electricity supply is not required for these products. Please see installation manuals for further details about installation possibilities.

CONTROLS

Gas is wonderfully controllable, but which type of control suits you best? The discretion of manual ignition, concealed behind the removable ash pan... the convenience of slide control... or the luxury and style of remote control?



Manual Control
Simple and discreet. The control system is located behind the fires fret or trim. Once the fire is lit rotate the control knob to adjust the flame height and heat output.



Semi Remote Control
Light the fire using the manual control system located behind the fires trim or fret then use the remote control handset to adjust the flame height and heat output.



Slide Control
A convenient control system which is located on the top right-hand side of the fire. Push and hold the lever down to ignite and move it up and down to adjust the flame height and heat output.



Fully Remote Control
The remote control handset is used to light the fire as well as to adjust the flame height and heat output.



Fully Automatic Easy Flame Control (EFC) - Discreet, easy access buttons are used to ignite the fire and adjust heat and flame height.



Fully Remote with Thermostat
The remote control handset can be used to light the fire as well as to adjust the flame height and heat output. In addition, the handset contains the extra benefit of a thermostatic control to regulate room temperature and a programmable timer that can be pre-programmed to ensure your room will be warm whenever you wish.



Touchlight (T/L) - Only available on some power flue fires, this control is operated by two switches, On/Off and High/Low.

FIRE BACK PANEL

Some Verine fires offer you the option of a brick back panel, plain back panel or ribbed back panel – simply choose the one that suits your room from the options available.



Plain Back



Brick Effect Back



Cream Ribbed Back



Black Ribbed Back

FUEL BED OPTIONS

Most Verine fires are available with the option to specify your own fuel bed and create a look to suit your home.



Coals



Pebbles



White Stones



Driftwood



Logs



Flame Only



high efficiency

Get up to 94% net efficiency from your gas fire

Verine has always had a reputation as a manufacturer of some of the most efficient fires on the market. Now we have set new industry standards with the introduction of the Verine HE high efficiency range: exceptional heat output combined with lower running costs compared to standard gas fires. Verine's R&D team has invested in developing the technology to meet the key objective of producing gas fires that save energy and as a result, help to keep costs down.

Glass fronted HE fires

This type of high efficiency fire has a glass panel across the front of the fire which radiates the heat generated from the fuel bed directly into the room. The glass panel concentrates the radiant heat so that more heat is forced into the room and less is lost through the chimney. Combined with convected heat which is produced by cool air drawn into the base of the fire through the heat exchanger and then emitted as warm air through the gap above the canopy, this makes glass fronted HE's the most efficient conventional flue fires available.

Hearth Mounted Glass Fronted



Frontier HE Pages 18-19



- Midas HE 14-15
- Quasar HE 16-17
- Orbis HE 20-21
- Meridian HE 22-23
- Avelli Suite 34-35

Hole in the Wall Glass Fronted



Fontana HE Pages 26-27

- Fontana Compact HE 24-25
- Atina HE 28-29
- Eden HE 30-31

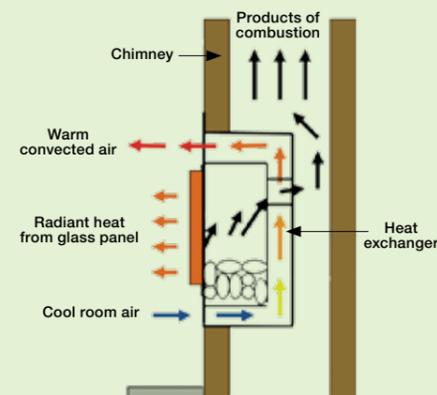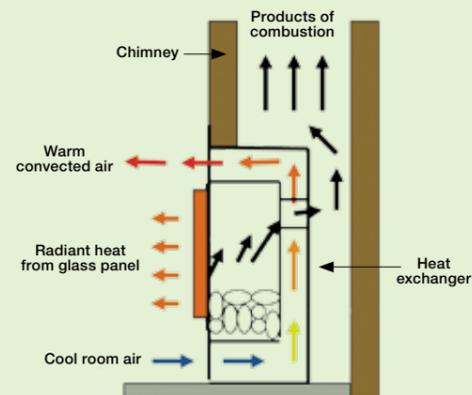


Open fronted HE fires



Orbis Plus Pages 12-13

- Midas Plus 8-9
- Quasar Plus 10-11

Open fronted HE fires provide the look and feel of a real open fire with net efficiencies of up to 74%. This type of fire provides both radiant and convected heat. Radiant heat is emitted from the coal effect fuel bed and the convected heat is generated by cool air drawn into the base of the fire which passes through a heat exchanger and is then emitted as warm air through the gap above the canopy.

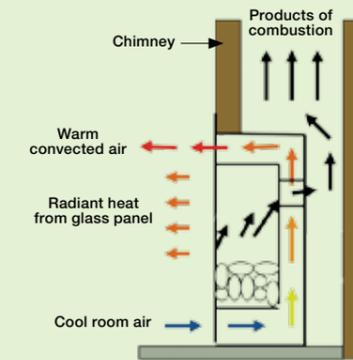


Balanced Flue HE fires



Elypse Pages 40-41

- Meridian BF 22-23
- Fontana Compact BF 24-25
- Fontana BF 26-27
- Eden BF 30-31
- Carmelo HE 32-33
- Avelli BF Suite 34-35
- Distinction BF Suite 36-37
- Da Vinci BF Suite 38-39
- Alpena 42-43
- Marcello 44-45

Designed for those who want all the benefits of a gas fire but don't have a built in chimney or flue in their home. A balanced flue fire comes with its own flue terminal which is vented directly through an outside wall. They are glass fronted, completely room sealed appliances and work by drawing and venting external air via a pair of co-axial tubes into the fire for combustion purposes. The radiant heat generated from the fuel-bed combines with convected heat, which is produced by cool air drawn into the base of the fire through the heat exchanger and then emitted as warm air through the gap above the canopy, making balanced flues one of the most efficient types of gas fires available.

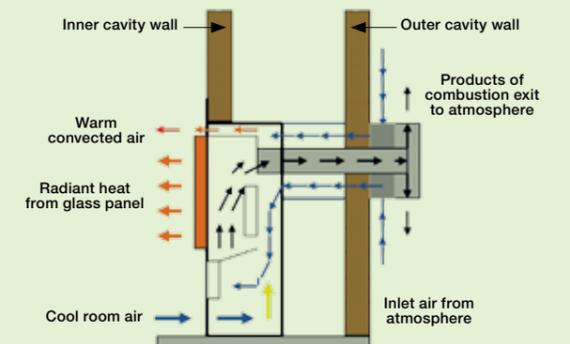

The Midas Plus

The Midas Plus is one of the most efficient open-fronted slimline gas fires available today and with a heat output of up to 4.1kW it is also one of the warmest products suitable for a pre-cast flue.

The Midas Plus is available in a choice of manual, remote or our easy access Easy Flame control systems. This extremely versatile fire can be styled with a wide range of Verine trims, frets or fascias and with an optional pebble fuel bed it is easy to create a look to suit your existing décor. See pages 64 to 65 for more information about Verine accessories.

SPECIFICATIONS


Description	Slimline inset convector
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convected
Heat input - high	6.5kW
Heat input - low	2.2kW
Heat output - high	4.1kW
Net Efficiency	up to 70%
Air vent required	Not normally required

N.B. Heat output and efficiency may differ slightly depending on type of fuel effect.

OPTIONS



DIMENSIONS

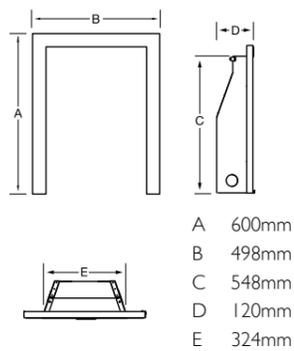

- A 600mm
- B 498mm
- C 548mm
- D 120mm
- E 324mm

ALTERNATIVES



Midas Plus with Profiled trim in silver, Bauhaus fret in polished silver and pebble fuel effect

Shown: Midas Plus with Profiled trim in brass, Blenheim fret in brass and coal fuel effect



The Quasar Plus

The Quasar Plus high efficiency gas fire boasts an impressive 70% net efficiency and can be installed in to almost any chimney or flue, including Pre-cast when fitted with a 3" rebated fire surround.

This open-fronted gas fire features a highly realistic coal fuel effect and is available as a manual, slide, easy flame or remote controlled fire. A pebble effect fuel bed can be purchased as an optional extra.

The Verine Quasar Plus can be styled with most trims, frets and fascias in our wide range of gas fire accessories on pages 64-65.

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convected
Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	4.3kW
Net Efficiency	up to 70%
Air vent required	Not normally required

OPTIONS



Natural Gas



Brick Chimney



Pre-Fabricated



Pre-Cast



Manual Control



Slide Control



Fully Easy Flame Control




Fully Remote Control



Plain Back

DIMENSIONS

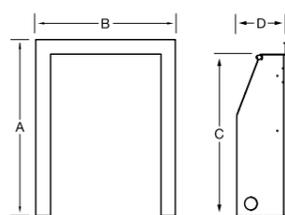

- A 600mm
- B 498mm
- C 548mm
- D 170mm
- E 365mm

Dimensions A & B refer to Standard trim only

ALTERNATIVES



Quasar Plus with pebble fuel bed



Shown: The Quasar Plus with Curved silver trim and Elegance silver fret

The Orbis Plus

The Orbis Plus is the first full depth open-fronted high efficiency gas fire from Verine. You can now achieve the look of a real open coal fire, combined with the convenience of gas fuel, at an incredible 73% net efficiency.

This stunning fire features an extra wide coal fuel effect bed, a beautiful flame picture and offers an incredible 4.6kW heat output.

Suitable for installation into standard brick chimneys and pre-fabricated flues, the Orbis Plus comes in a choice of manual, slide, easy flame or remote control and can be styled to suit your home with our wide range of trims and frets (see pages 64-65 for further details).


SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convected
Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	4.6kW
Net Efficiency	up to 73%
Air vent required	Not normally required

OPTIONS

-  Natural Gas
-  Brick Chimney
-  Pre-Fabricated
-  Manual Control
-  Slide Control
-  Fully Automatic Easy Flame
-  Fully Remote Control
-  Plain Back

DIMENSIONS

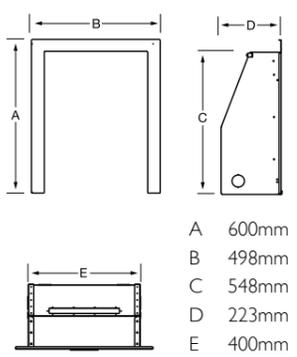

A 600mm
B 498mm
C 548mm
D 223mm
E 400mm

Dimensions A & B refer to Standard trim only



Shown: The Orbis Plus with Cast brass trim and Bauhaus brass fret

The Midas HE

This slimline high efficiency fire boasts a net efficiency of up to 89% and will fit almost any chimney or flue including pre-cast (BS EN 1858).

It also features a large viewing window and offers an incredible 3.2kW heat output.

SPECIFICATIONS

Description	Slimline inset convector
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convected
Heat input - high	4.0kW
Heat input - low	2.0kW
Heat output - high	3.2kW
Net Efficiency	up to 89%
Air vent required	Not normally required

OPTIONS



Natural Gas



Brick Chimney



Pre-Fabricated



Pre-Cast



Manual Control




Slide Control



Plain Back

DIMENSIONS



- A 497mm
- B 598mm
- C 550mm
- D 125mm
- E 327mm

Dimensions A & B refer to Standard trim only

ALTERNATIVES



Midas HE with pebble fuel bed



Shown: The Midas HE with Designer silver and black trim and Elegance polished fret.

The Quasar HE

The Quasar HE offers an impressive net efficiency of up to 78% and features one of the most realistic coal fuel beds on the market.

This glass fronted product has been designed to fit in to most chimney and flue types, including Pre-Cast flue when installed with a 3" rebated fire surround. Manual, slide and remote control options are available to choose from and a pebble fuel effect is available as an optional extra.

SPECIFICATIONS


Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.5kW
Heat input - low	3.5kW
Heat output - high	3.2kW
Net Efficiency	up to 78%
Air vent required	Not normally required

OPTIONS



* Only available on manual control coal effect models

DIMENSIONS

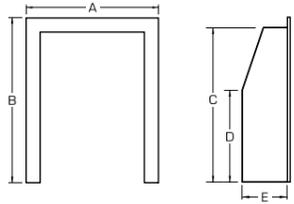

- A 497mm
- B 598mm
- C 550mm
- D 327mm
- E 180mm
- F 110mm
- G 365mm

Dimensions A & B refer to Standard trim only



Quasar HE with pebble fuel bed



The Frontier HE

The Frontier HE is the epitome of modern day living combining the benefits of a highly efficient gas fire with sleek contemporary styling. Frontier HE is available as a hearth mounted or hole-in-the-wall fire with a choice of three fascia colours; black and polished silver, champagne or bronze and champagne. A pebble effect fuel bed is available as an optional extra.

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.5kW
Heat input - low	3.5kW
Heat output - high	3.2kW
Net Efficiency	up to 78%
Air vent required	Not normally required

OPTIONS



Natural Gas



Brick Chimney



Pre-Fabricated



Pre-Cast



Manual Control*



Fully Remote Control




Black Ribbed Back

* only available on hearth mounted models

DIMENSIONS

Hearth Mounted

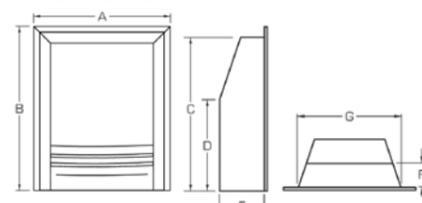

A 535mm	D 327mm	G 365mm
B 625mm	E 180mm	
C 550mm	F 110mm	

Wall Mounted



A 535mm	D 327mm	G 365mm
B 683mm	E 180mm	
C 550mm	F 110mm	

ALTERNATIVES



Frontier Hole-in-the-wall in champagne with pebbles



Frontier Hole-in-the-wall in bronze/champagne with coals



Shown: The Frontier HE Hearth Mounted in black/silver with coals

The Orbis HE

The Orbis HE is a full depth high efficiency fire providing a maximum heat output of 4kW and an incredible 89% net efficiency. This glass fronted fire is available with a choice of manual, slide and remote control operation. Create your own look with our extensive range of trims and frets shown on pages 64-65.

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convected
Heat input - high	5.0kW
Heat input - low	3.5kW
Heat output - high	4.0kW
Net Efficiency	up to 89%
Air vent required	Not normally required

OPTIONS



Natural Gas LPG*



Brick Chimney Pre-Fabricated




Manual Control Slide Control Fully Remote Control



Plain Back

* Only available on manual control models

DIMENSIONS

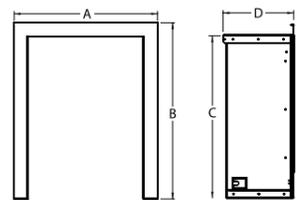

- A 497mm
- B 598mm
- C 550mm
- D 230mm
- E 400mm

Dimensions A & B refer to Standard trim only



Shown: The Orbis HE with Profiled Brass trim and Elegance Brass fret

The Meridian HE


A combination of contemporary fascia design and traditional log fuel bed is sure to make the Meridian an impressive feature in any home. This exceptionally versatile fire can be installed as a modern hole-in-the-wall fire or with a fire surround for a more traditional look. Choose between black ribbed, cream ribbed or brick effect fire back (flame picture will differ on balanced flue model).

SPECIFICATIONS


Description	Full depth inset convector	
Safety	Flame supervision device & oxygen depletion sensor*	
Type of heat	Radiant & Convected	
Model	Meridian	Meridian BF
Heat input - high	6.2kW	5.7kW
Heat input - low	4.8kW	4.4kW
Heat output - high	4.2kW	4.5kW
Net Efficiency	up to 75%	up to 84%
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only *Conventional flue models only

DIMENSIONS

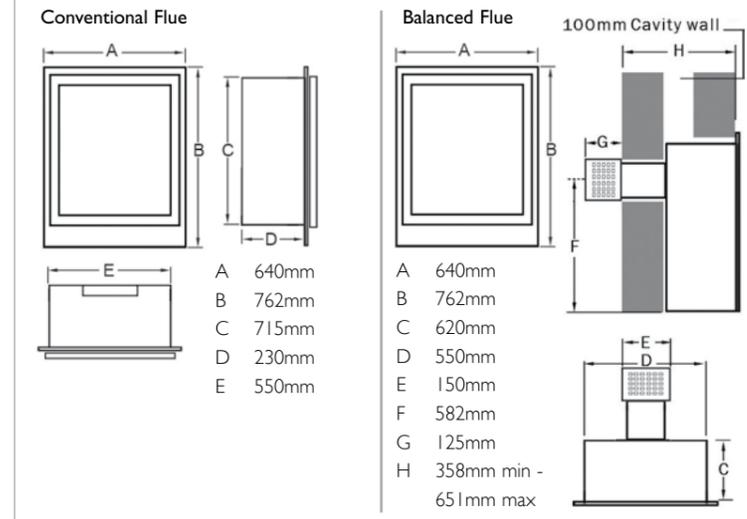

OPTIONS

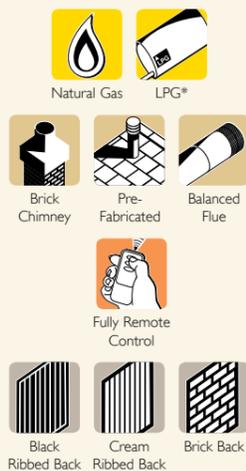

TRIM ALTERNATIVES



The Fontana Compact HE

The petite dimensions of the Fontana HE Compact makes it ideal for smaller living spaces. Featuring a stylish graphite grey and brushed steel fascia this high efficiency hole in the wall gas fire is up to 87% efficient (net) and is operated by a thermostatic remote control system. A balanced flue equivalent is also available.


SPECIFICATIONS

Description	Hole-in-the-wall convector	
Safety	Flame supervision device & oxygen depletion sensor*	
Type of heat	Radiant & Convected	
Model	Fontana HE Compact	Fontana HE Compact BF
Heat input - high	4.4kW	5.5kW
Heat input - low	3.1kW	3.0kW
Heat output - high	3.5kW	4.2kW
Net Efficiency	up to 87%	up to 84%
Air vent required	Not normally required	

* Conventional flue models only


DIMENSIONS

Fontana HE Compact

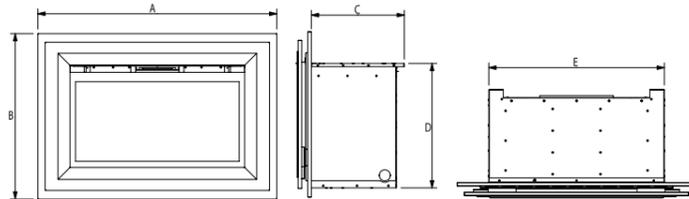

A 894mm C 361mm E 631mm
B 622mm D 452mm

Fontana HE Compact Balanced Flue

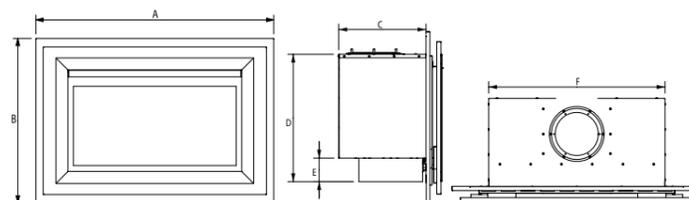

A 894mm C 315mm E 85mm
B 622mm D 460mm F 631mm

OPTIONS



* Conventional flue models only ** Balanced flue models only



Shown: The Fontana HE Compact. Flame picture may differ on balanced flue models.

The Fontana HE

The Fontana has an incredible 87% net efficiency and is operated by a thermostatic remote control system. It features a striking graphite grey and stainless steel fascia and comes with a highly realistic log fuel bed. Balanced flue models are also available.


SPECIFICATIONS

Description	Hole-in-the-wall convector	
Safety	Flame supervision device & oxygen depletion sensor*	
Type of heat	Radiant & Convected	
Model	Fontana HE	Fontana HE BF
Heat input - high	5.4kW	7.5kW
Heat input - low	3.0kW	3.5kW
Heat output - high	4.2kW	5.5kW
Net Efficiency	up to 87%	up to 82%
Air vent required	Not normally required	

* Conventional flue models only


DIMENSIONS

Fontana HE

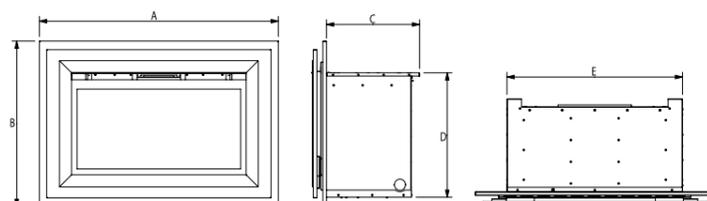

A 990mm C 385mm E 727mm
B 685mm D 515mm

Fontana HE Balanced Flue

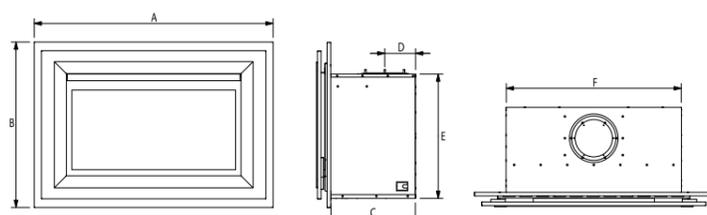

A 990mm C 350mm E 515mm
B 685mm D 128mm F 725mm

OPTIONS



* Conventional flue models only ** Balanced flue models only



Shown: The Fontana conventional flue.

The Atina HE

The Atina HE's perfect petite proportions and fabulous black reflective interior combined with a spellbinding flame makes this little hole-in-the-wall gas fire a magnificent centre-piece for smaller modern living areas.

The Atina HE features a maximum heat output of 3.5kW and is controlled by a fully sequential remote control system* with thermostatic operation so you can always maintain a comfortable room temperature that suits you.

*A 240V 3amp mains electricity supply is required.



Please refer to installation manual for more information regarding installation requirements before you start the installation.

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	5.0kW
Heat input - low	3.0kW
Heat output - high	3.5kW
Net Efficiency	up to 77%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

DIMENSIONS

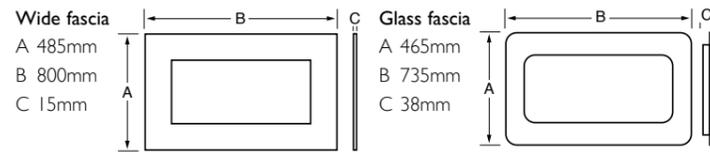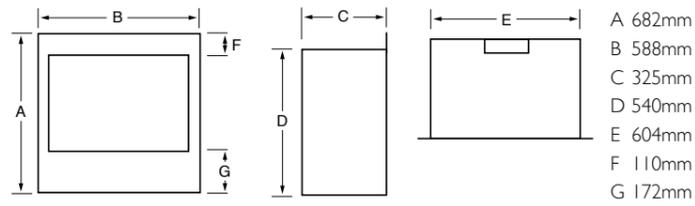

OPTIONS



POSSIBLE TRIM ALTERNATIVES



28 Shown: The Atina HE with glass silver fascia and white stones



The Eden HE


This glass fronted landscape hole-in-the-wall fire has an incredible 83% net efficiency and up to 5.2kW heat output. It features an enchanting flame picture and comes with a choice of log or white stone fuel bed. The Eden HE has been designed as a trimless* fire for a very minimalist appearance, or team with an optional designer trim for a more prominent centrepiece.

*A 240V 3amp mains electricity supply is required to power the remote control system. Please refer to installation manual for more information regarding installation requirements before you start the installation.

SPECIFICATIONS

Description	Full depth inset convector	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant & Convected	
Model	Eden HE	Eden HE BF
Heat input - high	6.9kW	6.3kW
Heat input - low	2.0kW	2.0kW
Heat output - high	5.2kW	4.8kW
Net Efficiency	up to 83%	up to 84%
Air vent required	Not normally required	

DIMENSIONS

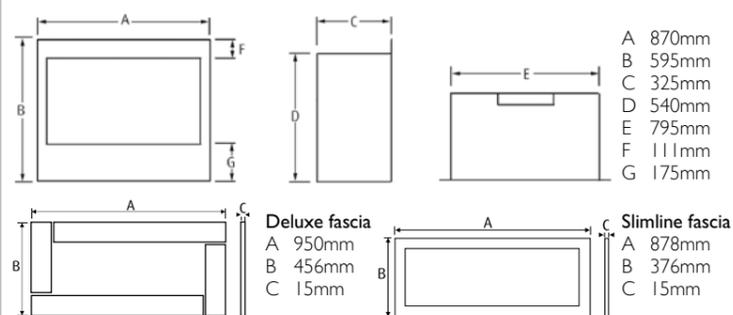

Dimensions for the Eden Balanced Flue model may vary please consult the installation manual for further details.

OPTIONS



ALTERNATIVES



Eden HE with Slimline fascia and white stones. Also available in Antique Brass



Eden HE Deluxe Antique Brass fascia with logs. Also available in silver



The Carmelo HE

If you're looking for extravagance combined with exceptional heat output then the Carmelo HE is the ideal gas fire for you. With a viewing area measuring 1145mm along with an enchanting flame picture this hole-in-the-wall fire is certainly a show-stopper, and with a heat output of 6.5kW and 75% net efficiency it provides exceptional performance too. What's more this fire can be installed almost anywhere in the home since it uses a balanced flue system with a choice of horizontal flue, vertical flue or chimney conversion flue kits available to choose from. Both log and white stone fuel beds are supplied with every fire.

*A 240V 3amp mains electricity supply is required to power the remote control system.

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	9.5kW
Heat input - low	5.5kW
Heat output - high	6.5kW
Net Efficiency	up to 75%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

OPTIONS



Natural Gas

LPG



Brick Chimney*

Balanced Flue




Fully Remote with Thermostat



Plain Back

* When installed using a chimney conversion balanced flue kit

DIMENSIONS

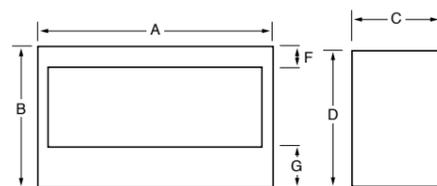

- A 1227mm
- B 560mm
- C 369mm
- D 531mm
- E 1150mm
- F 101mm
- G 172mm

ALTERNATIVES



Carmelo HE with white stones



The Avelli Suite

The Avelli gas fire suite is small in size but big in style. This beautiful fireplace comes in a choice of limestone or travertine surround and features a large, high efficiency gas fire with extremely realistic log effect fuel bed and a heat output of 4.2kW. The fire comes in a choice of black ribbed, cream ribbed or brick effect interior and is operated by a fully automatic remote control system.


This fire is suitable for installation in to a standard brick chimney or pre-fabricated flue. A balanced flue version is also available for homes without a built in chimney or flue.

SPECIFICATIONS

Description	Full depth inset convector	
Safety	Flame supervision device & oxygen depletion sensor*	
Type of heat	Radiant & Convected	
Model	Avelli Suite	Avelli Suite BF
Heat input - high	6.2kW	5.7kW
Heat input - low	4.8kW	4.4kW
Heat output - high	4.2kW	4.5kW
Net Efficiency	up to 75%	up to 84%
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only *Conventional flue models only

DIMENSIONS

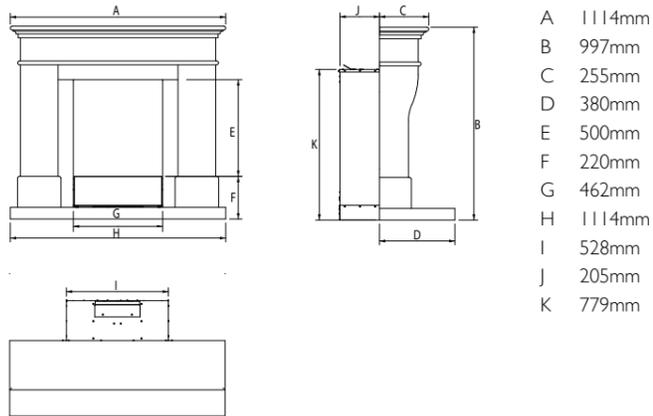

OPTIONS



ALTERNATIVES



Avelli in limestone surround with black ribbed back panels

Avelli with brick effect back

Avelli with black ribbed back

Shown: Avelli in travertine surround with cream ribbed back panels



The Distinction Suite


The Distinction suite features subtle chamfered edges, a realistic log fuel bed and a beautiful mesmerising flame. A choice of brick effect or black ribbed back panels and Limestone or Travertine surround is available. This balanced flue fire features thermostatic operation and an incredible 83% efficiency.

SPECIFICATIONS

Model	Distinction
Description	Complete balanced flue suite
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	8.7kW
Heat input - low	5.5kW
Heat output - high	6.5kW
Net Efficiency	up to 83%
Air vent required	Not normally required

All figures measured on 350mm horizontal flue duct in accordance with clause 7.11 of BS EN 613 : 2001

DIMENSIONS

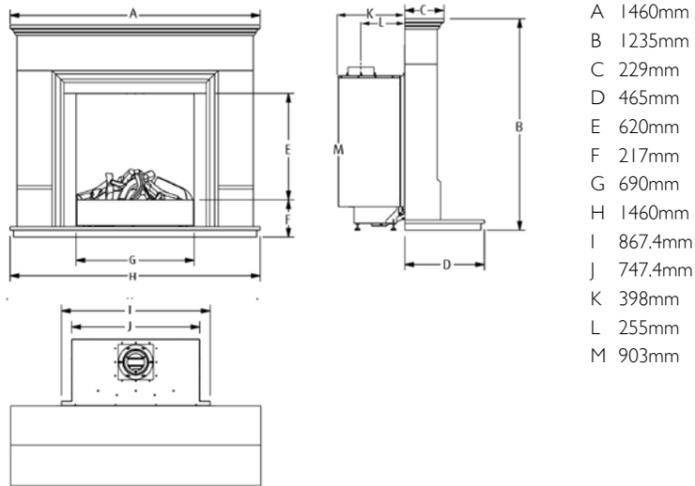

OPTIONS



* When installed using a chimney conversion balanced flue kit.

ALTERNATIVES



Distinction in Limestone with black ribbed back panels



Distinction in Limestone with black ribbed back panels

Distinction in Travertine with brick effect back panels



The Da Vinci Suite


This stunning fireplace features a highly realistic log fuel bed and is complemented by a beautiful and mesmerising lazy flame. With a choice of Limestone or Travertine surround and brick effect or black ribbed back panels you can create either a traditional or contemporary look. This balanced flue fire features thermostatic operation and an incredible 83% efficiency.

SPECIFICATIONS

Model	Da Vinci
Description	Complete balanced flue suite
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	8.7kW
Heat input - low	5.5kW
Heat output - high	6.5kW
Net Efficiency	up to 83%
Air vent required	Not normally required

All figures measured on 350mm horizontal flue duct in accordance with clause 7.11 of BS EN 613 : 2001

DIMENSIONS

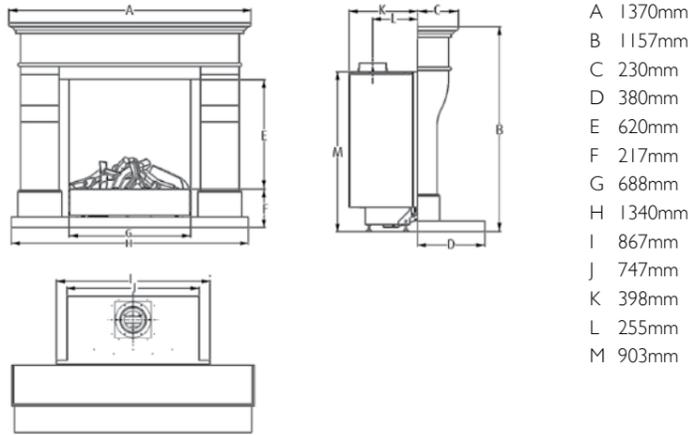

OPTIONS



* When installed using a chimney conversion balanced flue kit.

ALTERNATIVES



Da Vinci in Travertine with brick effect back panels



Da Vinci in Travertine with black effect back panels

Da Vinci in Limestone with black ribbed back panels



The Elypse

The super slim Elypse Balanced Flue has been specifically designed for homes without a chimney and its slim depth allows it to be easily installed into a standard cavity wall. This glass fronted product has an incredible 82% net efficiency and comes with a choice of brass, black or polished silver trim which can be complemented with your choice of any Verine fret (see pages 64-65).

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Model	Elypse BF
Heat input - high	3.8kW
Heat input - low	2.5kW
Heat output - high	2.8kW
Net Efficiency	up to 82%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

OPTIONS



Natural Gas



Balanced Flue




Manual Control



Brick Back

DIMENSIONS

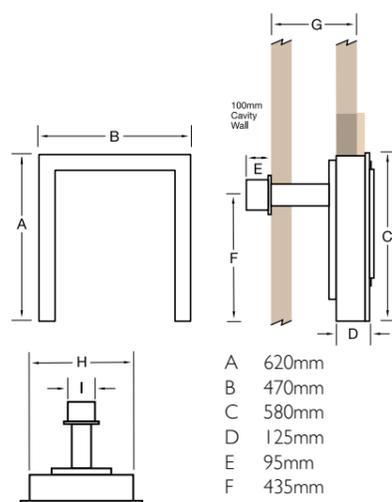

- A 620mm
- B 470mm
- C 580mm
- D 125mm
- E 95mm
- F 435mm
- G 675mm max
-130mm min
- H 400mm
- I 145mm

ALTERNATIVES



Elypse in brass with Elegance fret in brass



Elypse in silver with Media fret in polished silver



Shown: The Elypse in black with Elegance black fret

The Alpena

The Alpena boasts up to 94% efficiency, it is a glass fronted fire featuring plain back panels and a deep coal fuel bed (flame picture will differ on balanced flue model). The product can be styled with a variety of trims and frets available in the Verine range (see pages 64-65).

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.6kW
Heat input - low	3.0kW
Heat output - high	4.3kW
Net Efficiency	up to 94%
Air vent required	Not normally required


Heat input and output figures are specific to natural gas models only

OPTIONS



* only available on manual control models

DIMENSIONS

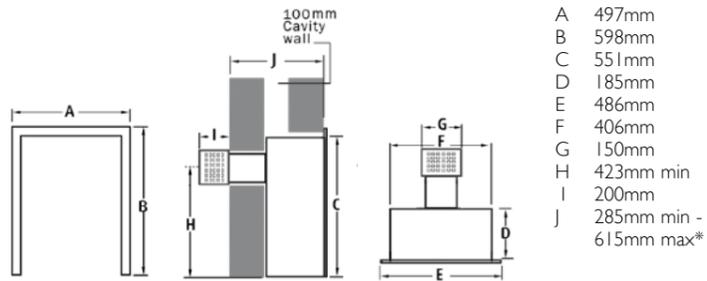

Dimensions A & B refer to Standard trim only

*Optional flue duct extension available to increase maximum length to 985mm

POSSIBLE TRIM ALTERNATIVES



Alpena shown as hole-in-the-wall installation with Frontier fascia



The Alpena with Frontier fascia in Silver/Black



Shown: The Alpena with Slimline Brass trim and Bauhaus Brass fret

The Marcello

This high efficiency balanced flue fire is perfect for modern homes without a chimney or flue and features a natural stone fuel bed. The Marcello can be wall hung or inset into most external walls* and is available with an optional stainless steel trim. The Marcello now comes with a fully automatic remote control system with thermostatic operation.


* An additional wall plate is required for inset applications.

SPECIFICATIONS

Description	Hang-on-the-wall balanced flue
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.8kW
Heat input - low	2.2kW
Heat output - high	4.2kW
Net Efficiency	up to 87%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

DIMENSIONS

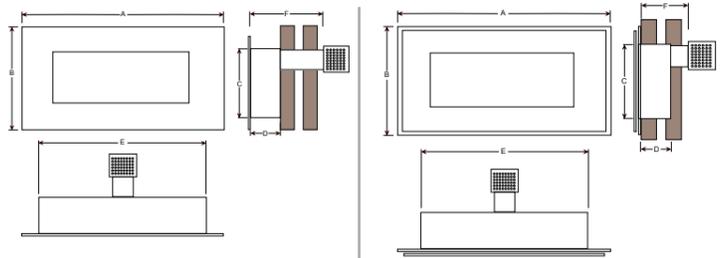

Hang on the Wall

- A 1110mm
- B 685mm
- C 612mm
- D 145mm
- E 747mm
- F 245mm min - 545mm max*

*Optional flue duct extension available to increase maximum length to 945mm

Inset

- A 1164mm
- B 739mm
- C 612mm
- D 100mm
- E 747mm
- F 200mm min - 500mm max*

*Optional flue duct extension available to increase maximum length to 900mm

OPTIONS



Natural Gas LPG



Balanced Flue



Fully Remote with Thermostat



Black Ribbed Back

TRIM ALTERNATIVES



Inset with rear wall plate



Shown: The Marcello wall mounted with optional stainless steel trim

The Ravena Powerflue


The Ravena is one of the most economical Powerflue fires available with an efficiency of up to 53%. It effectively combines a deep fuel bed with a slimline construction, allowing the fire to be fitted with most standard fireplaces. See pages 64-65 for more information about Powerflue systems and installation possibilities.

SPECIFICATIONS

Description	Full depth inset powerflue
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	3.3kW
Net Efficiency	up to 53%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

DIMENSIONS

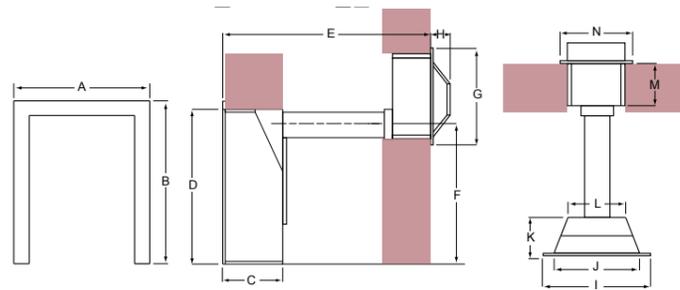

A 497mm	F 482mm	K 199mm
B 598mm	G 360mm	L 247mm
C 179mm	H 78mm	M 145mm
D 547mm	I 470mm	N 290mm
E 715mm max. fan unit inset 570mm min. fan unit outset	J 368mm	

Dimensions A & B refer to Standard trim only

OPTIONS



Natural Gas



Powerflue



Manual Control



Plain Back



The Acclaim

An ideal replacement for a real coal fire, the Acclaim is a tapered inset fire specifically designed to fit into existing firebacks. Flickering flames and a deep fuel bed glow create a highly realistic effect capturing the essence of a real open fire.

SPECIFICATIONS

Description	Full depth inset tray
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant
Model	16"
Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	2.0kW
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

OPTIONS



Natural Gas



LPG*



Brick Chimney



Pre-Fabricated




Manual Control



Fully Remote Control

* only available on manual control models

DIMENSIONS

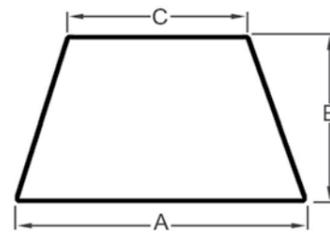

16"

A 336mm

B 200mm

C 250mm



Shown: The Acclaim with Bauhaus Black fret

The Zodiac

The Zodiac is a fully open fronted deep fuel effect fire featuring a 'stepped' fireback designed to maximise heat output whilst also providing wonderful warmth and glow. This model is available with the option of either manual, Easyflame or remote control.

SPECIFICATIONS

Description	Full depth inset radiant
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant
Heat input - high	6.9kW
Heat input - low	2.0kW
Heat output - high	4.2kW
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

OPTIONS



Natural Gas LPG*




Brick Chimney Pre-Fabricated



Manual Control Semi Remote Control Fully Automatic Easy Flame Control

* only available on manual control models

DIMENSIONS

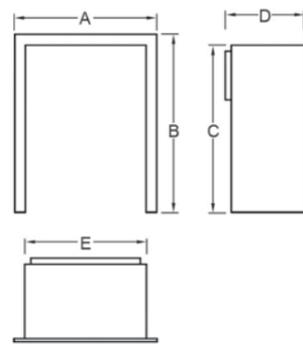

- 16"
 A 497mm
 B 598mm
 C 550mm
 D 225mm
 E 400mm

Dimensions A & B refer to Standard trim only



The Quasar

The Quasar has been specifically designed as a multi-installation fire and will fit most flue types including Pre-cast when fitted with a 3" rebated surround. It is also suitable for installation into a standard chimney without the need to remove the chairbrick. A pebble fuel effect can be purchased as an optional extra and a power flue version is available for homes with no chimney or flue.

SPECIFICATIONS

Description	Full depth inset radiant	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant	
Model	Quasar	Quasar PF
Heat input - high	6.9kW	6.9kW
Heat input - low	4.2kW	4.2kW
Heat output - high	3.3kW	3.3kW
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only

OPTIONS



Natural Gas

LPG †



Brick Chimney

Pre-Fabricated

Pre-Cast

Powerflue



Manual Control

Fully Remote Control *

Fully Automatic Easy Flame Control *

Touchlite ■

Side Control *



Plain Back


Black Ribbed Back

Brick Back

† Only available on manual control, plain back models
■ Powerflue only

* Not available on Powerflue models
○ Only available with plain back

DIMENSIONS

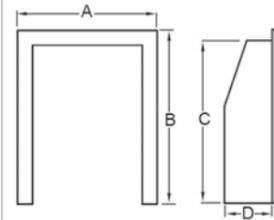

A	497mm
B	598mm
C	550mm
D	170mm
E	365mm

Dimensions A & B refer to Standard trim only

For Powerflue dimensions see page 66

ALTERNATIVES



Shown: The Quasar with Profiled Silver trim, Bauhaus Polished fret and coal fuel bed



The Frontier

This open fronted radiant gas fire features a contemporary one-piece fascia in a choice of black and polished silver, champagne or bronze and champagne fascia.

The Frontier has the option of manual or remote control operation and will fit in to most chimney and fuel types including Pre-cast when installed with a 3" rebated fire surround.

SPECIFICATIONS

Description	Full depth inset radiant	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant	
Model	Frontier	Frontier PF
Heat input - high	6.9kW	6.9kW
Heat input - low	4.2kW	4.2kW
Heat output - high	3.3kW	3.3kW
Air vent required	Not normally required	Not normally required

OPTIONS



Natural Gas



Brick Chimney



Pre-Fabricated



Pre-Cast



Powerflue



Manual Control





Fully Remote Control



Black Ribbed Back

DIMENSIONS

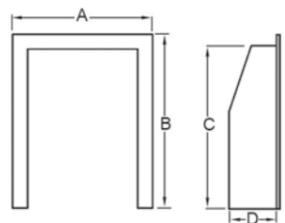

- A 490mm
- B 585mm
- C 550mm
- D 170mm
- E 365mm

ALTERNATIVES



Frontier in Champagne



Frontier in Bronze/Champagne



Frontier in Polished Silver



The Midas

This slimline radiant offers great flexibility and ease of installation. As well as being suitable for installation into standard chimneys and flues, the Midas is also available as a multi-installation Powerflue which can be flued from the side or rear of the product so that the fire does not need to be fitted against an outside wall (see pages 64-65 for further details).

SPECIFICATIONS

Description	Slimline inset radiant	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant	
Model	Midas	Midas PF
Heat input - high	6.5kW	6.8kW
Heat input - low	2.2kW	4.6kW
Heat output - high	3.1kW	4.3kW
Air vent required	Not normally required	Not normally required


Heat input and output figures are specific to natural gas models only

OPTIONS

-  Natural Gas
-  LPG*
-  Brick Chimney
-  Pre-Fabricated
-  Pre-Cast
-  Powerflue
-  Manual Control †
-  Fully Remote Control
-  Fully Automatic Easy Flame Control
-  Plain Back

* Only available on Powerflue models

DIMENSIONS

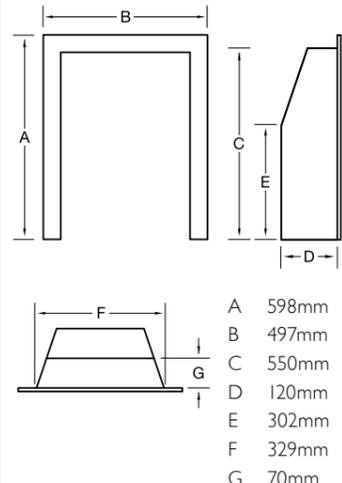

A	598mm
B	497mm
C	550mm
D	120mm
E	302mm
F	329mm
G	70mm

Dimensions A & B refer to Standard trim only



The Orbis

With a maximum heat output of 4kW the Orbis is one of the warmest open-fronted convector fires in the Verine range. It features a mesmerising and highly realistic coal fuel bed making this product one of the closest things you can get to a real coal fire. This model is available with a choice of manual, slide or remote control operation and a wide range of trims and frets (see pages 64-65) ensuring you'll get the product that is just right for you.

SPECIFICATIONS

Description	Full depth inset tray
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convector
Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	4.0kW
Air vent required	Not normally required

OPTIONS



Natural Gas
LPG*



Brick Chimney
Pre-Fabricated




Manual Control
Remote Control
Slide Control



Plain Back

* Only available on manual control models

DIMENSIONS

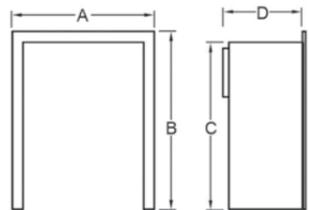

A 497mm
B 598mm
C 550mm
D 250mm
E 400mm

Dimensions A & B refer to Standard trim only



Shown: The Orbis with Profiled Stainless Steel trim and Bauhaus Polished fret

The Atina

The compact and minimalist design of the Atina hole-in-the-wall fire makes this a very popular contemporary product. Customize your own design with a wide choice of trim styles, colours and fuel beds.

SPECIFICATIONS

Description	Hole-in-the-wall radiant
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant
Heat input - high	7.0kW
Heat input - low	3.8kW
Heat output - high	N/A
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

OPTIONS



Natural Gas LPG



Brick Chimney Pre-Fabricated




Fully Remote Control



Plain Back

DIMENSIONS

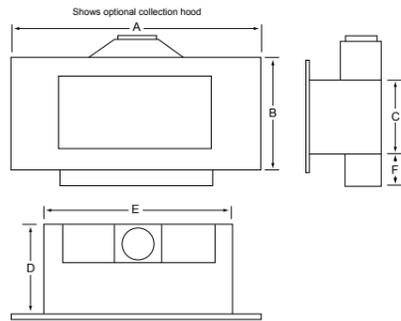

Strata	Slimline	XL
A 900mm	A 580mm	A 900mm
B 475mm	B 355mm	B 445mm
C 288mm	C 288mm	C 288mm
D 330mm	D 330mm	D 330mm
E 502mm	E 502mm	E 502mm
F 159mm	F 159mm	F 159mm

TRIM & FUEL BED ALTERNATIVES



Slimline Gloss Black trim.
Also available in Polished Steel



XL in Graphite Grey trim.
Also available in Cream Stone



Coals Pebbles White Stones Driftwood Logs Flame Only



The Vertex

The Vertex is a fashionable decorative hole-in-the-wall fire that creates a stunning, minimalist fireplace. Available with the option of a Slimline, XL or Strata trim, there is a style to suit any living area.

SPECIFICATIONS

Description	Hole-in-the-wall radiant
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant
Heat input - high	9.4kW
Heat input - low	6.2kW
Heat output - high	N/A
Air vent required	100cm ²

Heat input and output figures are specific to natural gas models only

OPTIONS



Natural Gas
LPG



Brick Chimney




Fully Remote Control



Plain Back

DIMENSIONS

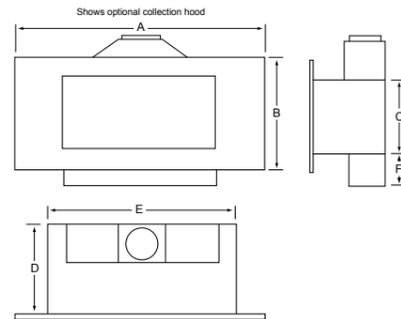

	Slimline	XL	Strata
A	780mm	1170mm	1170mm
B	410mm	525mm	525mm
C	343mm	343mm	343mm
D	330mm	330mm	330mm
E	710mm	710mm	710mm
F	159mm	159mm	159mm

TRIM & FUEL BED ALTERNATIVES



Strata trim



Slimline Brushed Steel trim

XL trim also available in black or bronze



Coals Pebbles White Stones Driftwood Logs Flame Only



Shown: Vertex with XL trim in graphite grey

Fire Accessories

Tailor your fire to match your living space

Make your Verine fire a unique fire. Choose your fascia, trim & fret and fuel bed from our divine selection to create a perfect match for your fire's setting.

Fascia options

Frontier Fascia

The Frontier fascia is made from a combination of extruded aluminium and painted steel. It is available in three stunning finishes; black and silver, champagne and bronze and champagne.

The Frontier hearth mounted fascia is suitable for all Verine hearth mounted inset fires* excluding the Elypse.

The Frontier wall mounted fascia is suitable for all Verine hearth mounted inset fires excluding the Elypse and Ravena.

HEARTH MOUNTED



Black/Silver



Champagne



Bronze/Champagne

WALL MOUNTED



Black/Silver



Champagne



Bronze/Champagne

Essence Fascia

The Essence is a contemporary fascia and is available in satin brass, antique brass, brushed steel and black. This fascia is suitable for the Midas, Midas Plus, Midas HE*, Orbis*, Orbis HE*, Quasar*, Quasar Plus*, Quasar HE*, Ravena and Zodiac.



Satin Brass



Antique Brass



Brushed Steel




Black


Fret options

Each of these frets is suitable for every hearth mounted gas fire in the Verine range. The black and polished silver frets are made from cast iron, and the brass and antique brass are made from cast brass.

Blenheim

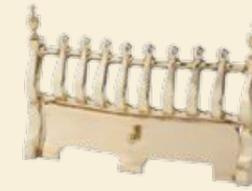


Brass - 16"

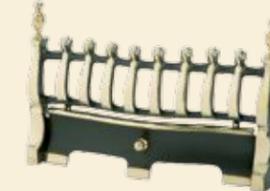

Antique - 16"




Black - 16"

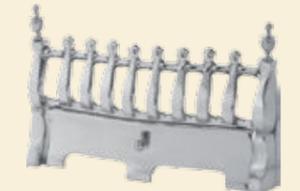

Polished - 16"

Elegance

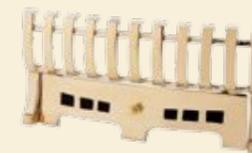

Brass - 16"



Black - 16"



Polished - 16"

Media



Brass - 16"



Polished - 16"

Edwardian



Brass - 16"



Black - 16"



Polished - 16"

Bauhaus



Brass - 18"



Black - 18"



Polished - 18"

Trim options

Standard trim



Brass Black Brushed silver Silver

Profiled trim



Brass Black Polished Silver

Cast trim



Brass Black Polished Silver

Curved trim



Brass Black Polished Silver

Designer trim



Brass & black Black & brass Brass Silver Black & silver Silver & black

Quality steel trims in a choice of four colours. This trim is suitable for all Verine hearth mounted inset fires, excluding the Elypse.

The profiled trim is made from steel and is available in brass, black and polished silver finishes. This trim is suitable for all Verine hearth mounted inset fires, excluding the Elypse.

The cast trims are made from cast iron (black and polished silver) and cast brass. Cast trims are suitable for the Midas HE*, Orbis*, Orbis Plus*, Orbis HE*, Quasar*, Quasar Plus*, Quasar HE* and Ravena.

The Curved trim is made from high quality extruded aluminium and is available in brass, black and polished silver finishes. The Curved trim is suitable for all Verine hearth mounted inset fires* excluding the Elypse.

Made from extruded aluminium, Designer trims create fabulous dual-coloured looks in a choice of six combinations. Suitable for all Verine hearth mounted inset fires excluding the Elypse.

The Verine Power Flue System



A gas fire creates a welcoming heart to any living room but many newer homes are being built without a chimney or flue so a conventional gas fire is not an option.

However, Power Flue gas fires have been specifically designed for homes without a conventional flue system providing a gas fuelled alternative heat source to an electric fire or radiator.



Several of the models in the Verine range are available as a Power Flue option and our unique Side Flue System available on the Midas means that you don't even need to install your fire on an outside wall – making this one of the most versatile gas fires on the market.

Shown below: an example of a basic Power Flue installation



The Verine Slimline Fan System fully recessed into an outside wall leaving only a discreet 3" projection. 96mm and 183mm spacers are available if required.

INSTALLATION EXAMPLE

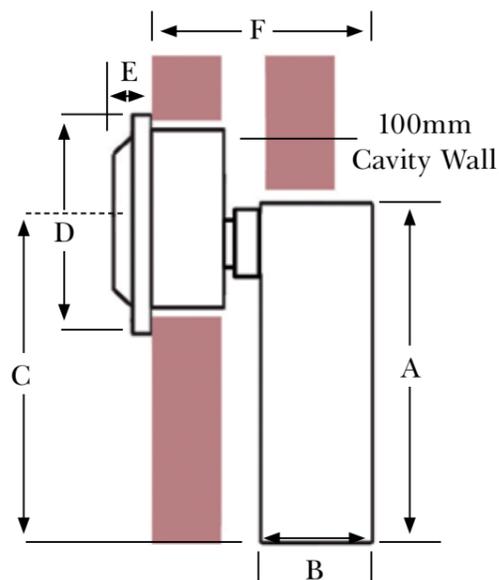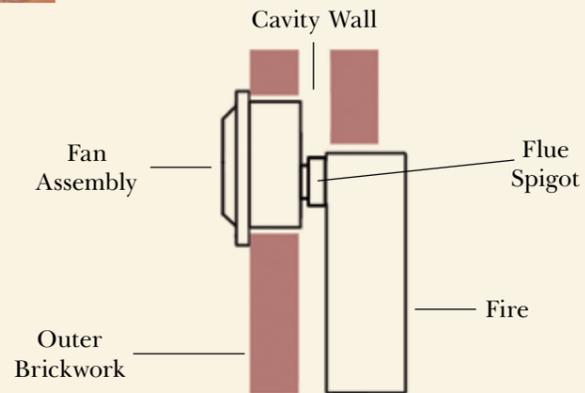


DIMENSIONS OF POWERFLUE FIRES


	Quasar	Ravena	Midas
A	547mm	547mm	525mm
B	179mm	179mm	131mm
C	482mm	482mm	425mm (min)
D	360mm	360mm	3560mm
E	78mm	78mm	78mm
F Min/Max	570-715mm	570-715mm	222-692mm

Installation Possibilities


The drawings below show a selection of the many possible installation situations.

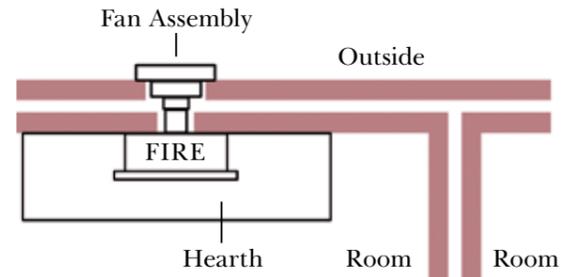

An example of a standard powerflue installation. The gas fire is flued directly through an outside wall via a straight, horizontal length of flue.

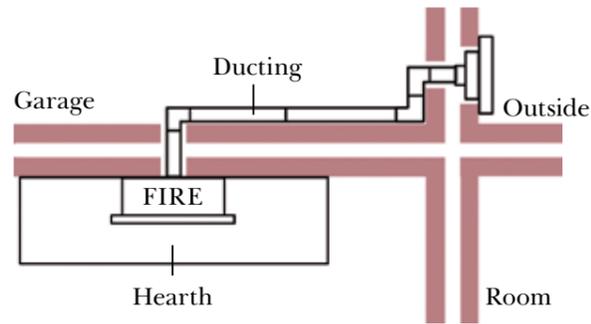


An example of a powerflue installation using three bends.

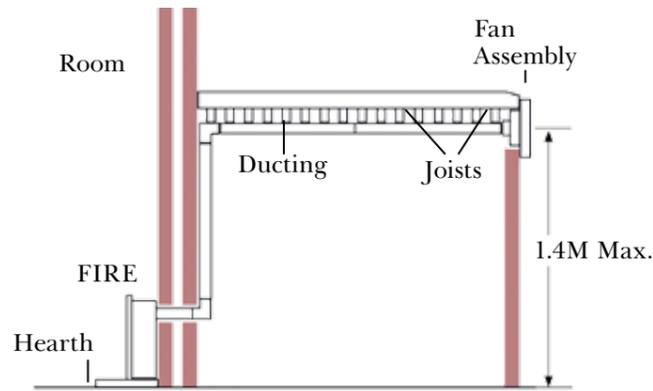


An example of a powerflue installation using a vertical section of flue pipe and two bends.

MIDAS POWER FLUE ONLY

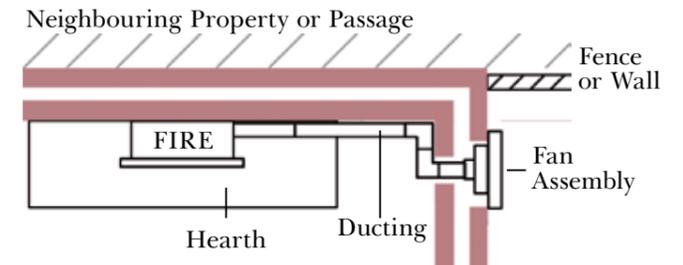

An example of a Midas powerflue vented from the side, directly through an outside wall.

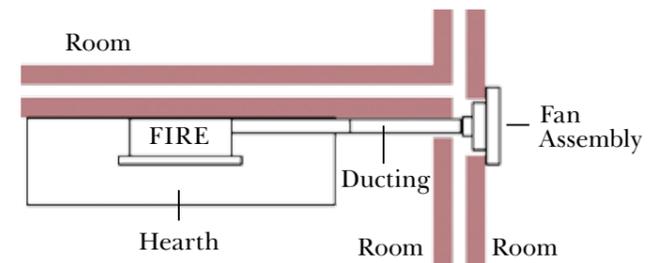

An example of a Midas powerflue vented from the side and using two bends.

IMPORTANT NOTICE

WARNING BFM Europe Limited is a Gas Safe Register company. We recommend that all of our fires are installed by Gas Safe Register engineers in accordance with our instructions.

DISCLAIMER Our policy is one of constant development and improvement. We therefore reserve the right to revise designs and specifications of our products without formal notice, patents pending. We always recommend our products be viewed in an approved showroom before purchase.

Whilst we have taken every care in the preparation of this brochure it is not intended to replace the installation manual which provides more detailed information.

Photography is for illustration purposes only and although every effort has been made to ensure accurate reproduction of typical installations and flame pictures they may vary according to fire model and flue types.

We accept no liability for any loss or damage arising directly or indirectly from the use of this brochure.

We recommend that all our fires are used in conjunction with central heating and not as a primary source of heat.

In the interests of personal safety a suitable fireguard is recommended when children, the elderly and the infirm are present.

(This brochure is copyright 2012 and must not be reproduced in whole or in any part without prior written permission).